

SVH 303

SIMAG

309 kg Modular Ice Machine

Complete range: SVH 152 – SVH 203 – SVH 222 – SVH 303 – SVH 503

Technical features

- High efficiency vertical evaporator cuber
- Stainless Steel finishing
- Low power and water consumption
- Self diagnostic system with led indicators
- Easy removable condenser filter
- Front evaporator access: immediate access to the evaporating plate for quick self-maintenance operations
- Head only ice maker: requires a separate storage bin to collect the ice produced

Matching bins

Machine	Bins		kg
SVH 303	✓	R150	181
	✓	R190	243
	CBT48FMCD	R300	406
	●	RC300	391

✓ : Direct coupling

● : Ice chute cut-out performed upon installation
CBTxxxxxxx: accessory needed

Voltage

230/50/1 Standard version


220/60/1 Available on demand

Technology and Certifications



Type of ice

Half dice cube

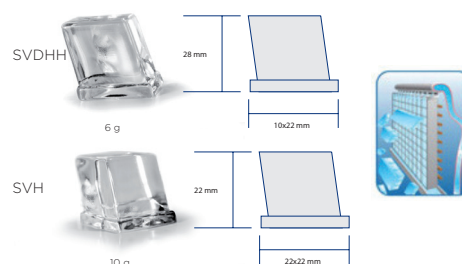

Machine dimensions

Net size WxDxH	760 x 620 x 575 mm
Net weight	72 kg
Shipping size WxDxH	830 x 690 x 720 mm
Shipping weight	88 kg

SIMAG
Via Lainate 31 - 20005 Pogliano Milanese - (Milano)
Italy Tel. +39 02 93960323
e-mail: sales@simag.it




www.simag.it

SVH 303

SIMAG

309 kg Modular Ice Machine



Complete range: SVH 152 – SVH 203 – SVH 222 – SVH 303 – SVH 503

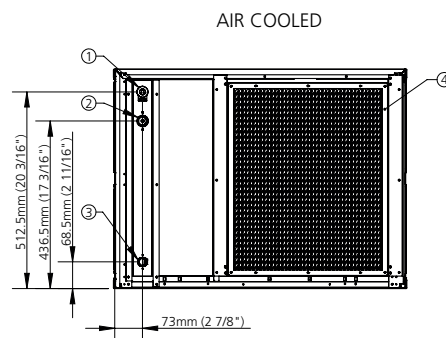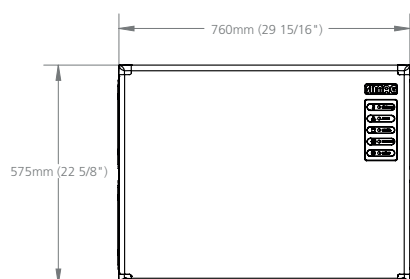


UNIT OF MEASUREMENT: mm (inch)

1. POWER CORD 220V 50Hz;
2. 3/4" GAS-WATER INLET ;
3. 13/16" OD - WATER OUTLET;
4. AIR INLET / AIR FILTER;
5. 3/4" GAS-WATER OUTLET, WATER COOLED UNIT ONLY;
6. 3/4" GAS-WATER INLE , WATER COOLED UNIT ONLY.

AIR FLOW

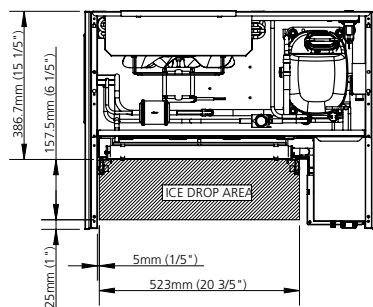

WATER COOLED

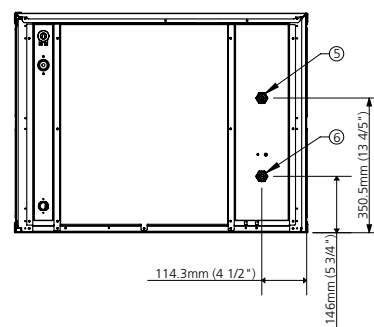

DRAINAGE PER GRAVITY

Operating Limits

	Minimum	Maximum
Air temperature	10°C	40°C
Water temperature	5°C	35°C
Water pressure	1 bar	5 bar
Electrical voltage	-10 %	+10 %

Specifications and design
are subject to change without notice

Model	Voltage	Daily production kg		Power input Watt (*)	Refrigerant		Fuse A	Consumptions (**)		
		10°C/10°C	21°C/10°C		Type	Charge g		kWh/ 100kg	kWh/ 24h	Water l/h
SVHH 303 A	230/50/1	309	285	1050	R290	149 g	16	9,94	22,85	15,8
SVH 303 A	230/50/1	294	276	1050	R290	149 g	16	10,4	22,81	14,3

(*) Power Input: at 43°C Ambient Temperature

(**) Water Consumption: at 32°C Air and 21°C Water