

ATHENA RV

FAN-ASSISTED REFRIGERATION

Buffets with laminated wood structure with fan assisted refrigeration. The ventilation grids of the compressor unit are cut directly into the wooden structure for elegant visual continuity.

Upper plexiglass sneezeguard fixed or mobile with electrical system. Well 26cm deep with drain cock. Static refrigeration of the well, gas R290. Digital thermostat (+2°/+10°) and lighting with LED. Two polyamide castors with brake included. GN pans on request.



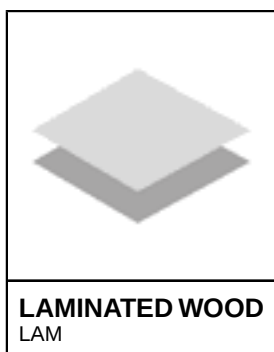
MEASURE / CAPACITY

3 GN











4 GN

5 GN

PANELLING





FINISHES

						
OLM LOM	BIRCH LBE	WHITE SAND LWS	VEINED WHITE LBV	FOG LNE	WALNUT LNO	WENGÈ LWE
						
VEINED BLACK LNV	ANTHRACITE LAN	SILVER LAR	CAPPUCCI-NO LCP	GREY LGR	CLAY LTC	SAGE LSV
						
IVY LER	LIME LIM	NIAGARA LNI	OCEAN LOC	SKY LSK	ROSE LRS	SAFFRON LZA
						
COLOR TO SCIEGLERE IN THE FUTURE TO BE DEFINED						

OPTIONAL TRAY HOLDERS

					
6	7	8	3/FO	6/FO	9/FO
					
3-A	3-TUB	3-SST	9-A	9-STTA	9-TUBA
					
9C	9C-SSTC	9C-TUBC			

VARIOUS

					
5	Z	PZH	HZ6	HHTR	45CUT
					
DIST	GN	UK	ADS	TEBT	

BACKSPLASHES/RAISED SHELVES



16

BODY



4



10



14



15

EXTENSION



17



17CH

TECHNICAL DATA

<i>Technical data</i>	ATHENA 3	ATHENA 4	ATHENA 5	ATHENA 6
GN capacity	3	4	5	6
External dimensions (mm)	1174 x 747 x 1515	1499 x 747 x 1515	1824 x 747 x 1515	2149 x 747 x 1515
Net Weight (kg)*	197	213	271	329
Packing size (cm)	135 x 92 x 185h	155 x 92 x 185h	185 x 92 x 185h	227 x 92 x 185h
Operating temperature (°C)	+2 / +10	+2 / +10	+2 / +10	+2 / +10
Refrigerant gas	R290	R290	R290	R290
Power consumption (Watt)	617	630	642,5	652
Supply voltage at 50 Hz (V)	230 V	230 V	230 V	230 V

* Model weight without options

TECHNICAL DRAWING

