

KIDS BM

BAIN-MARIE HEATING

Bain-marie heated buffet, for primary schools and family hotels. Height adjustable feet with skirting board. It is equipped with a 26cm deep stainless steel well with rounded edges with a drain cock and heated by silicone adhesive elements. Well temperature regulated by digital thermostat. Each module can be configured with different types of lighting, sneezeguard, tray holders among with many other optionals.




MEASURE / CAPACITY

2 GN	3 GN	4 GN	5 GN
------	------	------	------

PANELLING



LAMINATED WOOD
STANDARD











STAINLESS STEEL
SST



POWDER COATED STEEL
CST

FINISHES

						
OLM LOM	BIRCH LBE	VEINED WHITE LBV	WHITE SAND LWS	FOG LNE	WALNUT LNO	WENGÈ LWE
						
VEINED BLACK LNV	ANTHRACITE LAN	SILVER LAR	CAPPUCCI- NO LCP	GREY LGR	CLAY LTC	SAGE LSV
						
IVY LER	LIME LIM	NIAGARA LNI	OCEAN LOC	SKY LSK	ROSE LRS	SAFFRON LZA
						
STAINLESS STEEL SST						

OPTIONAL LIGHTING



LED



HALO



HALOLED



SLIM LED



SLIM HALO

SNEEZEGUARD



G1



G2



SLIM A



SLIM B



SLIM C

TRAY HOLDERS



6



7



8



3



3-SST



3-TUB



9 SST



9-TUB



9



9C-TUB







9C-SST




9C

VARIOUS

					
SCAM	CAM	5	ADS	TUBE	45CUT
					
DIST	GN	UK	TEBT		

BODY

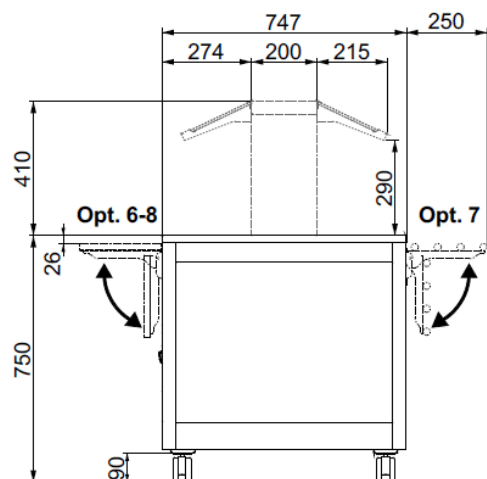
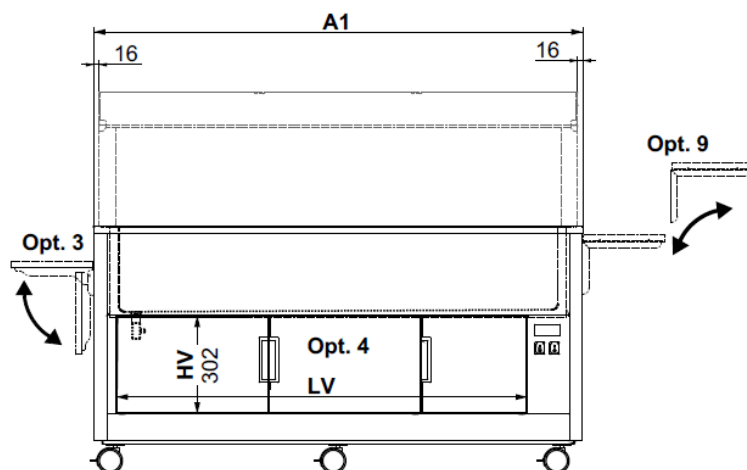
					
Z	R75	10	4	4 CST	4 SST

TECHNICAL DATA

<i>Technical data</i>	KIDS 2 BM	KIDS 3 BM	KIDS 4 BM	KIDS 5 BM
GN capacity	2	3	4	5
External dimensions (A1 x D x H) mm	846 x 747 x 750	1171 x 747 x 750	1496 x 747 x 750	1821 x 747 x 750
Well dimensions (A2 x D x H) mm	692 x 593 x 260	1017 x 593 x 260	1342 x 593 x 260	1667 x 593 x 260
Lower compartment dimensions (Lv x Hv) mm	608 x 302	933 x 302	1258 x 302	1583 x 302
Net Weight (kg)*	74	66,5	76,5	85,5
Packing size (cm)	120 x 100 x 120/185h	135 x 92 x 120/185h	155 x 92 x 120/185h	185 x 92 x 120/185h
Operating temperature (°C)	0 / +90	0 / +90	0 / +90	0 / +90
Power consumption (Watt)	1000	1500	2000	2500
Supply voltage at 50 Hz (V)	230 V	230 V	230 V	230 V

* Model weight without options

TECHNICAL DRAWING



OPERATOR SIDE

	A1	A2	Lv
2/1	846	692	608
3/1	1171	1017	933
4/1	1496	1342	1258
5/1	1821	1667	1583

