



TC 32 BUFFALO

tritacarne
meat grinders



TC 32 BUFFALO



TC 32 BUFFALO

- Grandi prestazioni in una struttura compatta
- Bocca ad alta produzione dal disegno esclusivo
- La grande disponibilità di accessori la rende adatta sia per l'uso nel banco che nel laboratorio
- Bocca inox esterna con rapido fissaggio a baionetta
- Collo introduzione quadro per grande produttività anche in seconda passata
- Sistema di protezione ingranaggi con doppio paraolio
- Motore ventilato per uso continuo
- Comandi inox IP 67 con inversione

Opzioni:

- Sistema di protezione contro i sovraccarichi di corrente
- Tramoggia gigante e super (no TC 32 Buffalo S)
- Gambe alte medie e basse (no TC 32 Buffalo S)
- Piano portavassoio estraibile
- Bocca unger e semiunger
- Insacatrice continua
- Paraspruzzi
- Sistema di protezione interbloccato per uso piastre con foro > 8 mm
- Predisposizione per Format S con pedaliera (no TC 32 Buffalo S)

- Compact heavy duty mincer
- Exclusive design high output grinding head
- Available both table top or floor standing (many optionals available)
- Stainless steel head with quick bayonette fitting
- Square feeding neck (high output also with pre-minced meat)
- Gear box with double sealing system
- Ventilated motor for continuous operation
- IP 67 protection rated controls with reverse

Optionals:

- Overload protection
- Larger trays: "gigante" or "super" (not available for TC 32 Buffalo S)
- Short, medium, long legs (not available for TC 32 Buffalo S)
- Receiving tray holder
- Half/total unger system
- Stuffer kit
- Splash guard
- Interlock protection for more than 8 mm holes plates (An interlock protection system is required in order to utilize more than 8 mm holes plates)
- Arrangement for Format S with pedal controls (not available for TC 32 Buffalo S)



TC 32 BUFFALO S



Leva avvita/svita ghiera TC 32
TC 32 ring fixing/removing tool




Estrattore piastre
Plates removal tool


Optionals



Supporto vassoio
Tray support



Tramoggia gigante
Larger feed tray

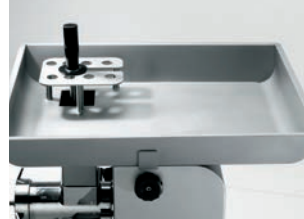


Tramoggia super
Lager tray super



Gambe con ruote
Legs with wheels



Protezione bocca per piastra con foro
 $\varnothing > 8$ mm
Safety device for $\varnothing > 8$ mm plates




Paraspruzzi
Splash guard



Pedaliera
Pedal controls



Standard o 1/2 Unger Unger Totale
enterprise Unger Totale

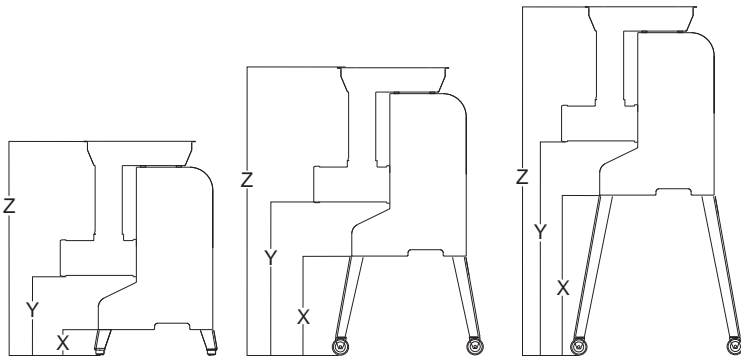

Gambe basse con piedino
Short legs with feet




X: 131 mm
Y: 271 mm
Z: 741 mm

Gambe medie con ruote
Medium legs with wheels

X: 416 mm
Y: 556 mm
Z: 1026 mm

Gambe alte con ruote
High legs with wheels

X: 688 mm
Y: 828 mm
Z: 1298 mm



					A	B	C	D	E	F	G	U	V			
	watt/HP	kg/lh.	\varnothing mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	kg	mm	kg
TC 32 Buffalo Hp 3	2.205/3	1ph	700	4.5	385	315	540	540	150	620	720	94	82	65	640x760x850	80
TC 32 Buffalo Hp 4	2.940/4	3ph	700	4.5	385	315	540	540	150	620	720	94	82	65	640x760x850	80
TC 32 Buffalo Hp 4 S	2.940/4	3ph	700	4.5	446	320	625	538	123	592	691	94	82	70	640x760x850	85
Tramoggia standard	-	-	-	-	-	-	-	535x450x90	-	-	-	-	-	-	-	-
Tramoggia gigante	-	-	-	-	-	-	-	535x660x90	-	-	-	-	-	-	-	-
Tramoggia super	-	-	-	-	-	-	-	563x900x120	-	-	-	-	-	-	-	-