

SCE 50

SIMAG

48 kg Self-contained Ice Machine

Complete range: SCE 20 - SCE 30 - SCE 40 - SCE 50 - SCE 65 - SCE 90 - SCE 105

Technical features

- Stainless steel bodywork - scotch brite
- Vertical pump
- Main switch (ON/OFF)
- Built-in cleaning system
- Easily accessible components
- Low power and water consumption
- Optimum ratio between ice production and bin capacity
- Reduced dimensions
- Double defrosting system



Internal bin capacity



22 kg of ice


1100 cubes

Type of ice

Full Cubes



34 mm



Machine dimensions

Voltage

230/50/1 Standard version

115/60/1 - 220/60/1 Available on demand

Net size WxDxH 467 x 570 x 912 mm

Net weight 38 kg

Shipping size WxDxH 540 x 640 x 900 mm

Shipping weight 44 kg

Technology and Certifications



MILANO OFFICE
Sales Dept.
Tel. +39 02 93900215
e-mail: sales@simag.it
Service Dept.
Tel. +39 02 93960357
e-mail: service@simag.it

SIMAG FAR EAST
Singapore Office
Tel. ++65 6738 5393
e-mail: scotsman@scotsman.com.sg


www.simag.it

SCE 50



48 kg Self-contained Ice Machine

Complete range: SCE 20 – SCE 30 – SCE 40 – SCE 50 – SCE 65 – SCE 90 – SCE 105

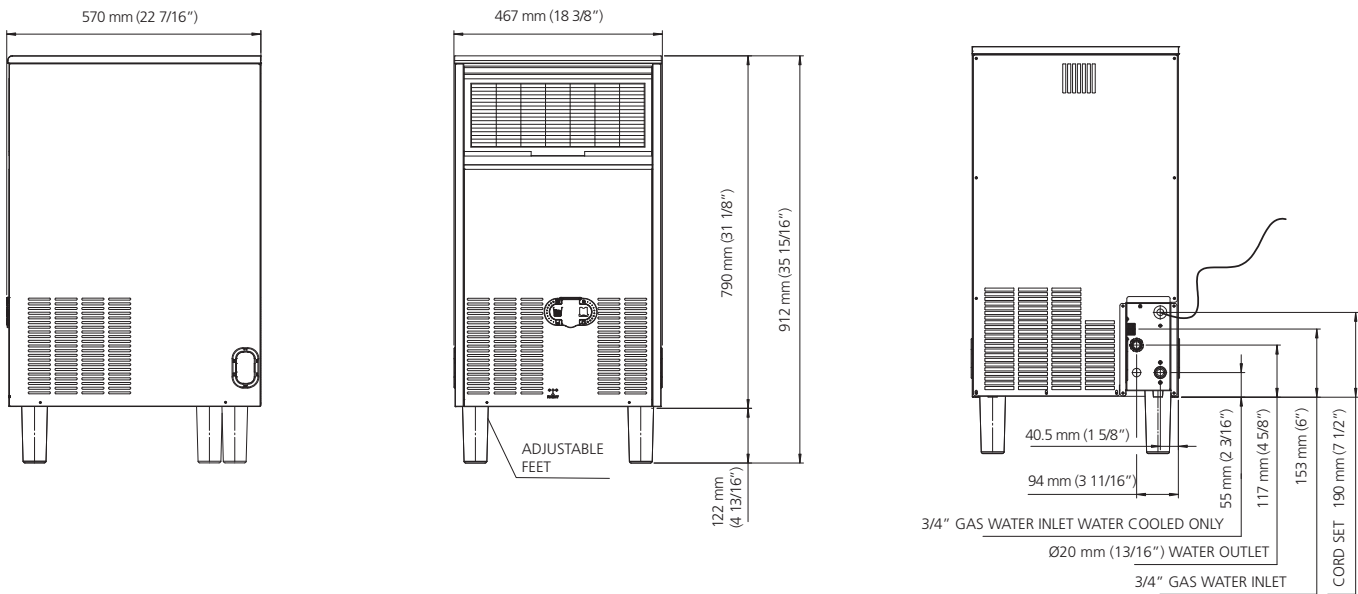

DRAINAGE PER GRAVITY

Operating Limits

	Minimum	Maximum
Air temperature	10°C	43°C
Water temperature	5°C	38°C
Water pressure	1 bar	5 bar
Electrical voltage	-10 %	+10 %

Specifications and design
are subject to change without notice

Model	Voltage	Daily pro- duction kg	Power input Watt (*)	Refrigerant		Fuse A	Consumptions (**)		
		10°C/10°C		Type	Charge kg		kWh/ 100kg	kWh/ 24h	Water l/h
SCE 50 A	230/50/1	48	620	R134a	0.300	10	34.3	12	3.9
SCE 50 W	230/50/1	50	530	R134a	0.270	10	22.9	9.6	49.0
SCE 50 A	115/60/1	48	730	R134a	0.310	10	n.a.	n.a.	7.8
SCE 50 W	115/60/1	51	580	R134a	0.270	10	23.5	10	50.0

(*) Power Input: at 43°C Ambient Temperature

(**) Water Consumption: at 32°C Air and 21°C Water