



EB3FX/HC/PB - Lincat FilterFlow FX Counter-top Combined Water Boiler & Chiller with Push Button Dispense - W 250 mm - 3.0 kW

The FilterFlow Combined Water Boiler and Chiller exists because we don't believe you should have to use two different appliances in July and January - it provides hot and cold water on tap, 24/7.

- ✓ Convenient push button operation, ideal for front of house and self service
- ✓ Filtered chilled and hot water on tap 24 hours a day, space saving and economic - no need for a separate boiler and chiller
- ✓ Narrow 250mm footprint saves valuable counter space without compromising capacity or performance
- ✓ Built-in water filtration system improves water quality and reduces scale build-up. High volume, easy change FilterFlow cartridge
- ✓ Easily operated from a large, colour touchscreen display. Menu navigation is quick and easy with the temperature and timer simple to adjust
- ✓ Enhanced diagnostics identify possible causes. The on screen diagnostic information will enable the engineer to identify the parts needed and repair your water boiler at first visit

Specifications

Summary

Brand	Lincat
Range	FilterFlow
Series	FX Counter-top Boiler
Power Type	Electric
Unit Type	Counter-top
Available in UK Only	No
UK Warranty	2 Years Parts and Labour Warranty
Export Warranty	Contact your local dealer
GTIN	5056105118237

Power and Performance

Total Power kW	3.0
Temperature Range °C	<11 [Cold]; 70-98 [Hot]
IP Rating	IP23
Hourly Output Litres	12 [Cold]; 28 [Hot]
Hourly Output Cups	60 [Cold]; 140 [Hot]
Temperature Control	Electronic

Key Specifications

Refrigerant Type	R134a
Outlet	Push Button [Twin Spout]
Dispense Lock	No
WRAS Approved	Yes

Capacity

Hot and Cold Water Output	Yes
Rapid Draw Off Litres	5.0 [Hot]
Rapid Draw Off Cups	25
Capacity Litres	7.0

Weights and Dimensions

Unit Height (External) mm	595
Unit Width (External) mm	250
Unit Depth (External) mm	570
Net Weight Kg	24.8

Supply Connections

Requires Installation	No
Requires Electrical Supply	Yes
UK 3 Pin Plug	Yes
Requires Hardwiring	No
Electrical Supply Rating Watts	3,000
Single Phase Amps	13
Single Phase Voltage	230
Water Connection Pressure Bar	2.0-7.0
Water Connection	3/4"


Shipping

Packed Weight Kg	31.7
Packed Height cm	88
Packed Width cm	65
Packed Depth cm	38

Available Accessories

DP10	DESCALER POWDER
FC04	Filter Cartridge for Lincat FilterFlow Water Boiler
PI36	INLET CONNECTION HOSE EB

Technical Picture

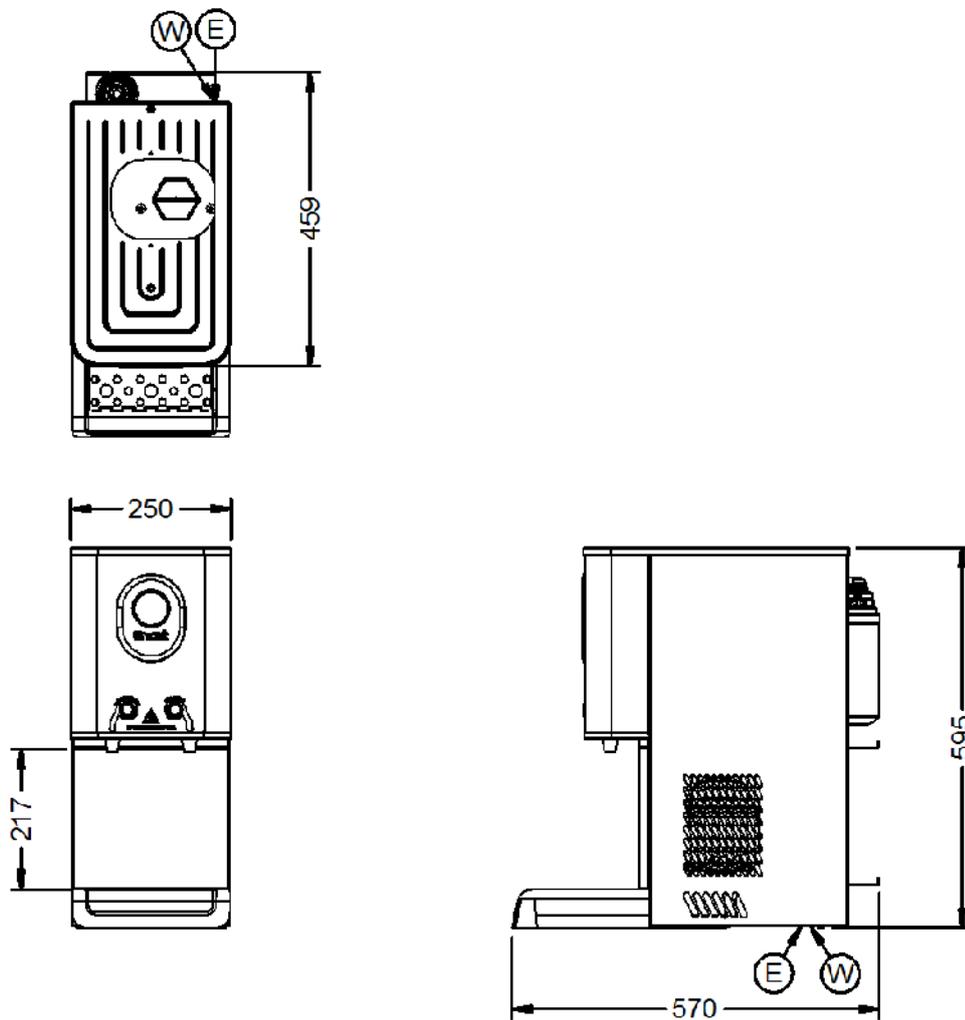

**Lincat Limited**

Whisby Road,
Lincoln, LN6 3QZ,
United Kingdom

Company No: 2175448

A member company of

**Customer Care**

Tel: +44 1522 875500
Email: care@lincat.co.uk

Export Customers

Tel: +44 1522 875536
Email: export@lincat.co.uk

Opening Hours

Monday – Friday:
8.30am – 5pm