


# A variety of heating patterns offer tasty results quickly.

# Offering versatile menus quickly

- Combining Convection, Grill, and Microwave functions for speedy heating of frozen, refrigerated, or roomtemperature dishes.
- 3-step continuous heat setting (3-Step setting) is possible.
- Fan speed adjustable from 30 to 100%.



## A compact design that fits on store counters

- The compact design fits on counters that are 60 cm deep.
- A heat-insulated body with safety in mind.



## Easy-to-see, easy-to-operate touch panel system

Touch panel system is easy to operate.
With the Memory function, you just press a number to start heating.





## Professional Microwave Convection Oven (For Reheating) RE-SCV2

Dimensions:	474 x 565 x 412 mm (W x D x H)
Power Consumption:	Single Phase 100 V, 3750 W
High-Frequency Output:	1200 to 0 W / Switchable in 9 Steps
Convection Heater Output:	1350 W, Temperature Adjustable 180 to 250°C
Grill Heater Output:	1800 W (2-Step Switchable)
Preheat Adjustment Range:	150°C (Stand-by Preheat), 180°C, 250°C
Oven Capacity:	10 L
Memory Capacity:	10 to 1,000
Product Weight:	Approx. 37.4 kg



### You can combine Convection, Grill, and Microwave functions into 6 versatile heating patterns for frozen, refrigerated, and room-temperature dishes.















Microwave

Convection

Grill and Microwave

Convection and Microwave

Fan Speed Settings (30% to 100%)

Circulates the heat around the oven interior, browns food, and crisps the outside.

#### Menu Examples







Fondant chocolate


### **3-Step Setting Possible**

You can combine 6 heating patterns, and cook continuously for up to 3 steps.

#### Cooking Time Example (with Preheating)

		0.		
Heating Method	Menu	Amount	Time	Fan
①Grill and Microwave ②Grill	Pizza (frozen)	One 8-inch pizza (220 g)	Approx. 2 min 20 sec (1) approx. 1 min 30 sec, (2) approx. 50 sec	30%
①Convection and Microwave ②Convection	Hot dog (refrigerated)	One (110 g)	Approx. 40 sec (1) approx. 32 sec, (2) approx. 8 sec	40%
Grill and Microwave	Fondant chocolate (frozen)	One (90 g)	Approx. 30 sec	50%

### Dimensions

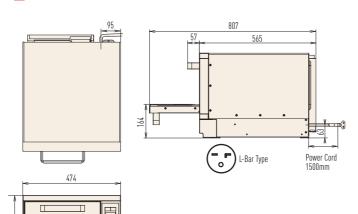

#### Specifications

opoon	ioutiono			
Dimensions	Exterior (mm)	474 x 565 x 412 (W x D x H)		
	Interior (mm)	270 x 330 x 110 (W x D x H)		
Interior Capacity		10 L		
High-Frequency Output		1200 to 0 W, 9-Step Switchable		
Power Supply		Bottom (2-Duct) Power Supply Method		
Grill Heater Output		1800 W (2-Step Switchable)		
Convection Heater Output		1350 W, Temperature Adjustment: 180 to 250°C		
Preheat Adjustment Range		150°C (Stand-by Preheat), 180°C, 250°C		
Memory Capacity		10 to 1,000 (100 When Shipped)		
Rating	Power Supply	Inverter Power Supply (Single Phase 200 V), 50 Hz/60 Hz Common (Hz Free)		
	Power Consumption	3750 W		
Applicable Power Supply Outlet		L-Bar Type, 20 A, 250 V		
Door Opening Direction		Vertical		
Accessories		Ceramic Tray, Wire Rack, Ceramic Plate White, Specified SD Memory Card		
Product Weight		Approx. 37.4 kg		









### The Panasonic Group takes the environment into full consideration when manufacturing products.



We thoroughly pursue energy-saving efficiency in the products that we deliver to our customers, and aim to reduce the amount of CO2 emitted during product use.



We reduce the amount of new resources used in new products, and recycle resources from end-of-life products, to promote resource recycling.



Panasonic products comply globally with the standard values for using substances\* designated by the RoHS Directive as impacting the environment. Lead, cadmium, mercury, hexavalent chromium, polybrominate biphenyls, and polybrominated diphenyl ethers.

### **Panasonic**