





Electric deck oven for pizza

2 decks composition

iDeck consists of one or two baking chambers and an optional prover or stand. The oven's baking surface is made of refractory material, providing the perfect heat distribution over the whole surface. This oven is particularly suitable for direct or indirect pizza baking. Temperature adjustment is electro-mechanical, with independent control of the ceiling and floor heating elements. The oven door is hinged at the bottom, with a tempered glass window to check the product during baking. The stand consists of a painted metal structure, while the prover is a stainless steel cabinet equipped with a heating thermostat. The prover can reach the maximum temperature of $65^{\circ}C(149^{\circ}F)$, whereas the maximum temperature of the baking chamber is $450^{\circ}C$ ($842^{\circ}F$).

C€ERE

FUNCTIONING

)e

- Heating by armoured heating elements
- Separate heating element control by mean contactors that are controlled by thermostats
- Maximum temperature reached 450°C
- Continuous measurement of temperature by probe indicator

CONSTRUCTION

- Front structure made in folded stainless steel
- Oven panels made pre-painted metal sheets
- Door in stainless steel with shutter with hinge at bottom with balancing spring
- Door handle in stainless steel
- Tempered crystal glass
- Control panel on the right front side
- Baking surface in refractory brick
- Upper and lateral structure in aluminized sheet
- Thermal insulation in mineral wool

BAKING ELEMENT INTERNAL DIMENSIONS

Internal height	
Internal depth	
Internal width	
Baking surface	

	-
140 mm	
660 mm	
1056 mm	
0,7 m ²	


STANDARD EQUIPMENT

- Illumination by halogen lamp
- Independent maximum temperature safety device (only electronic version)

ACCESSORIES

- Prover on wheels height 1000 mm
- Stand height 600, 900 mm
- 4 wheels kit
- Additional trayholder slides
- Stacking kit
- Hood

TOP VIEW

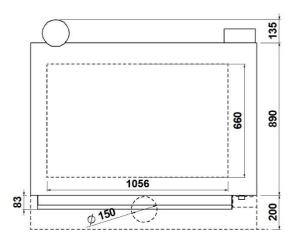






PM 105.65

(assembled with stand height 900mm)

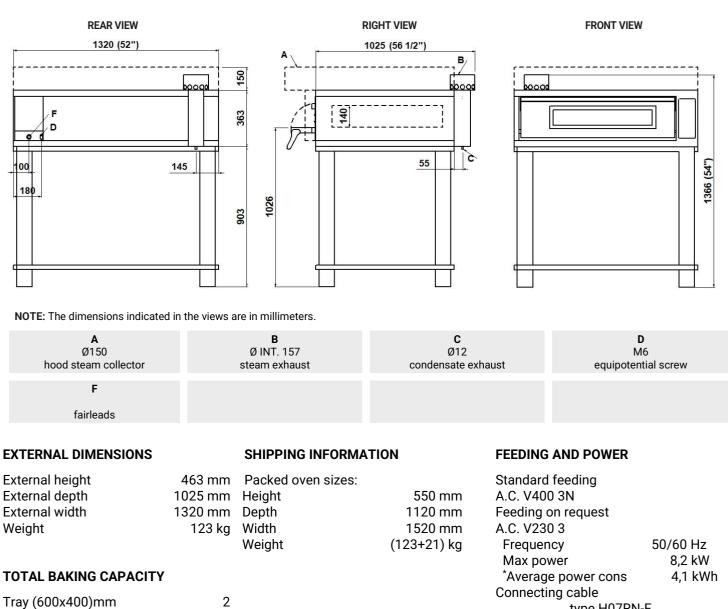

External depth External width Weight

Ĭ

)e

Tray (600x400)mm	2
Pizza diameter 300mm	6
Pizza diameter 450mm	2

Standard feeding		
A.C. V400 3N		
Feeding on request		
A.C. V230 3		
Frequency	50/60 Hz	
Max power	8,2 kW	
*Average power cons	4,1 kWh	
Connecting cable		
type H07RN-F		
5x4mm ² (V400 3N)		
4x6mm ² (V23	0 3)	
Prover power supply (optional)		
A.C. V230 1N 50/60 Hz		
Max power	1,5 kW	
*Average power cons	0,8 kWh	
Conn. cable type H07RN-F 3x1,5mm ²		


* This value is subject to variation according to the way in which the equipment is used NOTE: MORETTI FORNI S.P.A. reserves the right to modify the characteristics of the products illustrated in this publication without prior notice





PD 105.6	5
----------	---

(assembled with stand height 900mm)

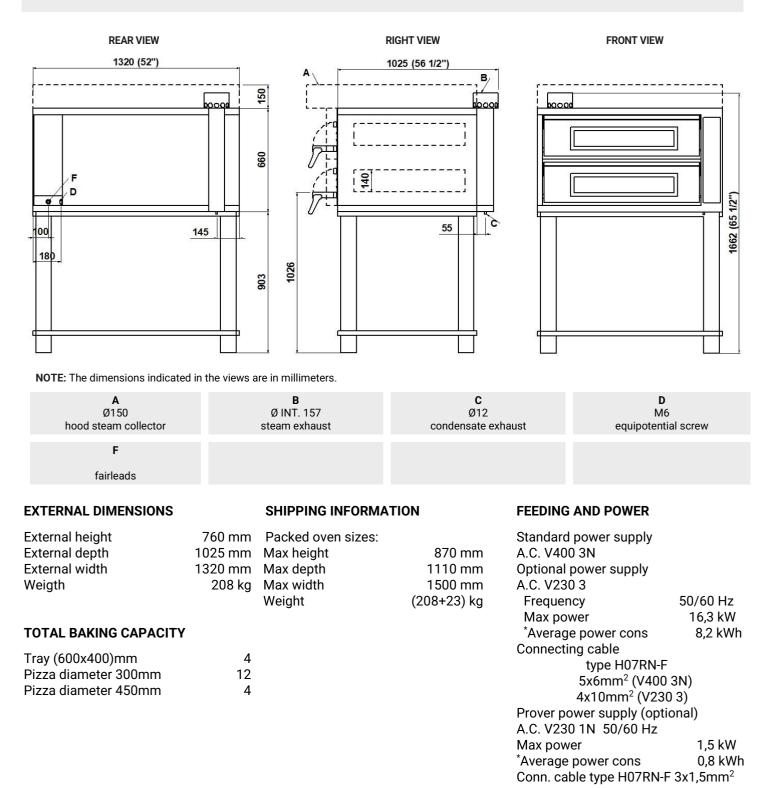

* This value is subject to variation according to the way in which the equipment is used

NOTE: MORETTI FORNI S.P.A. reserves the right to modify the characteristics of the products illustrated in this publication without prior notice